

PEDITRED LP WITH LEVEL BASE FRAME




INSERT STYLE:

INSERT COLOR:


CATALOG NUMBER: G3

PART NUMBER:


NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY

					
RECYCLED RUBBER	EXTERIOR CARPET	HEAVY-DUTY CARPET	VINYL	VINYL-ABRASIVE	POURED ABRASIVE INSERT
G3RR	G3EC	G3HC	G3V	G3VA	G3PA
19R001XXX	19C018XXX	19C010XXX	19V002XXX	19M001XXX	19A005XXX


PEDITRED INSERT STYLES

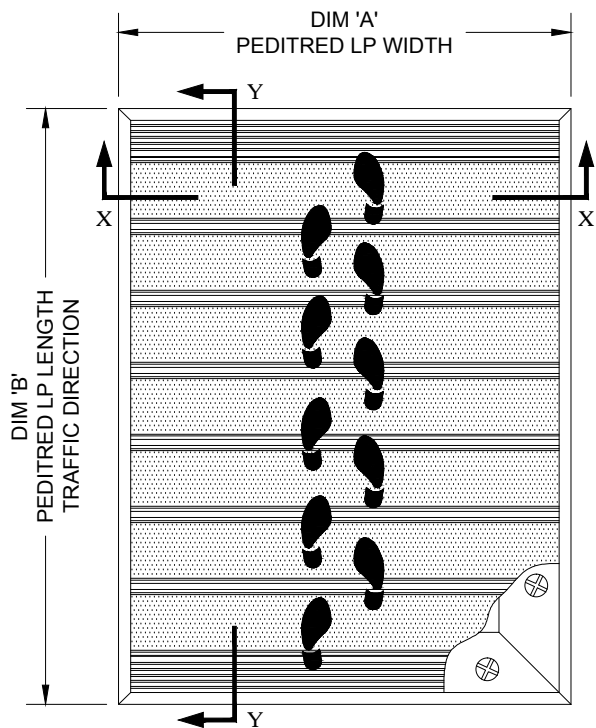

TYPICAL PLAN VIEW

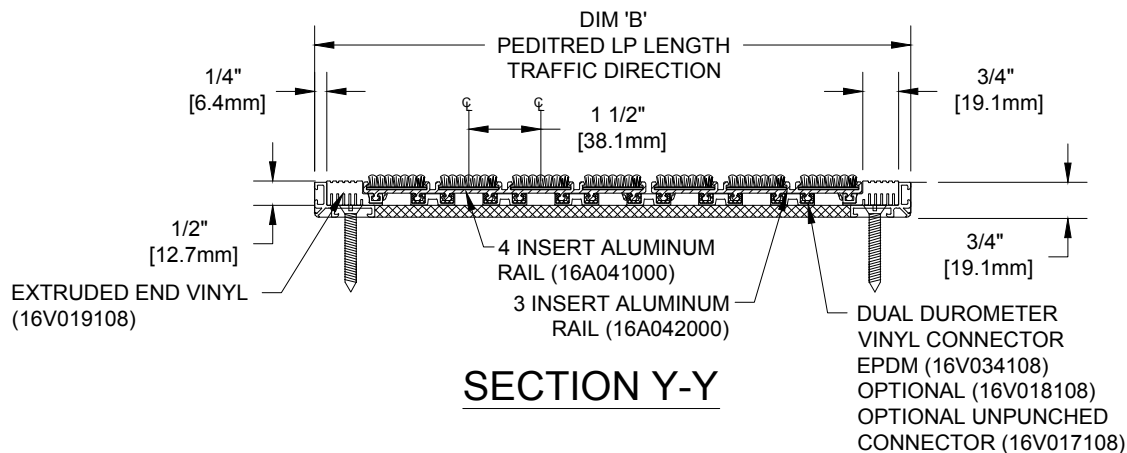

SECTION Y-Y

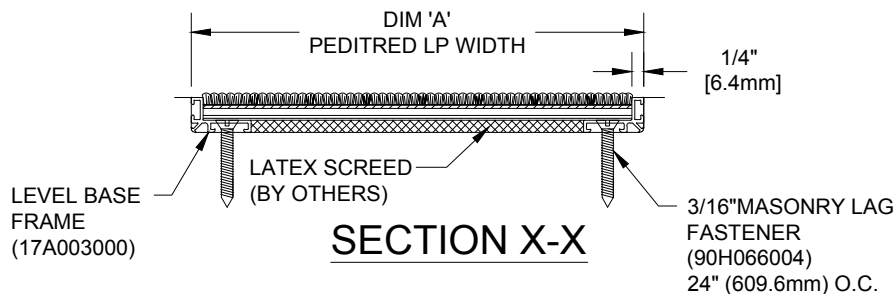

SECTION X-X

NOTES:

*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER

*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 100 SQUARE FEET

*PLEASE VERIFY TRAFFIC DIRECTION

*PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD.

*SUPPLIED IN STANDARD MILL FINISH. (OPTIONAL FINISHES AVAILABLE AT ADDITIONAL COST)



PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: