






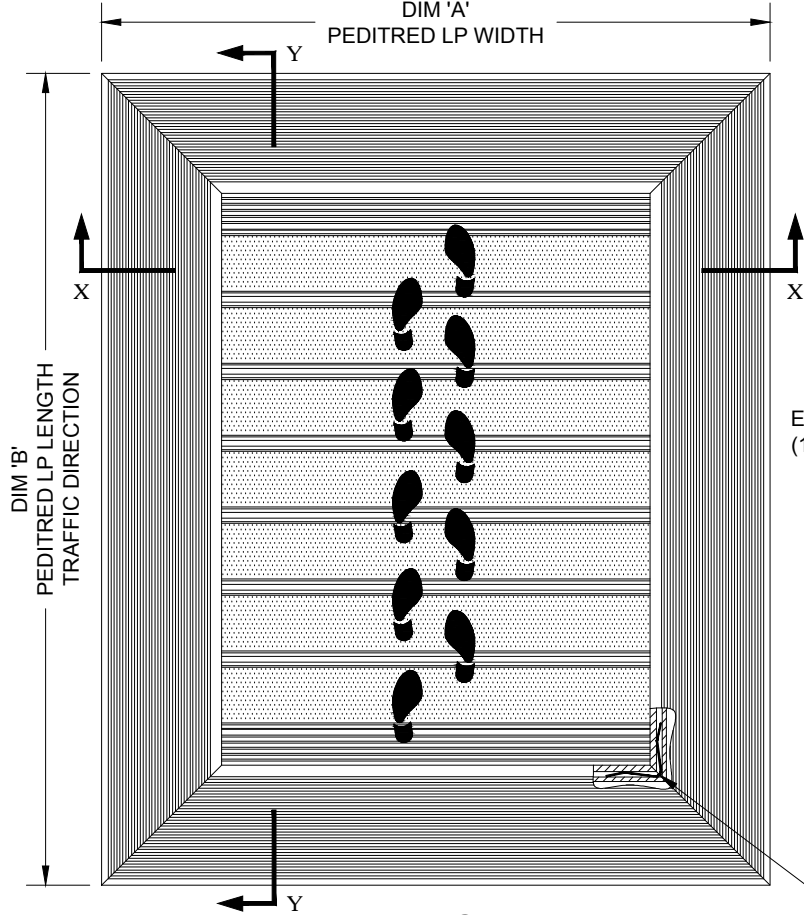
PEDITRED LP WITH TAPERED ALUMINUM FRAME

INSERT STYLE: INSERT COLOR: CATALOG NUMBER: G3 PART NUMBER:


NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY

- | | | | | | |
|---|---|---|---|---|---|
|  |  |  |  |  |  |
| RECYCLED RUBBER
G3RR
19R001XXX | EXTERIOR CARPET
G3EC
19C018XXX | HEAVY-DUTY CARPET
G3HC
19C010XXX | VINYL
G3V
19V002XXX | VINYL-ABRASIVE
G3VA
19M001XXX | POURED ABRASIVE INSERT
G3PA
19A005XXX |


PEDITRED INSERT STYLES



TYPICAL PLAN VIEW

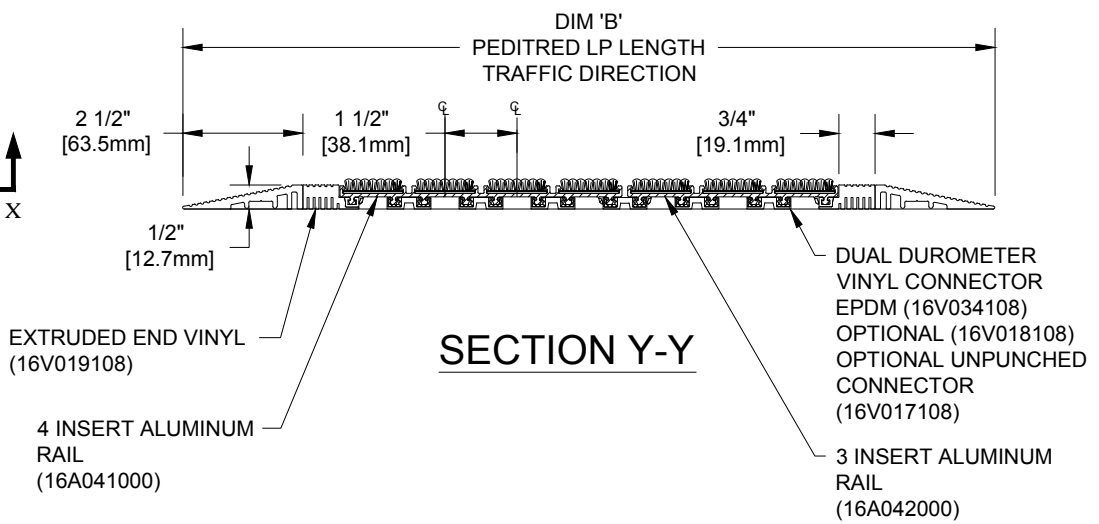

SECTION Y-Y

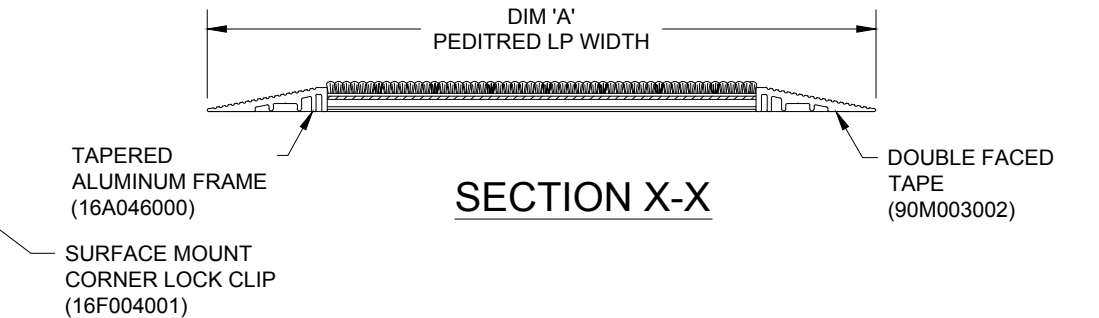

SECTION X-X

NOTES:

- *ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER
- *MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 100 SQUARE FEET
- *PLEASE VERIFY TRAFFIC DIRECTION
- *PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD.
- *SUPPLIED IN STANDARD MILL FINISH. (OPTIONAL FINISHES AVAILABLE AT ADDITIONAL COST)



PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: