

PEDITRED LP WITH THRESHOLD FRAME







INSERT STYLE:

INSERT COLOR:

CATALOG NUMBER: G3


PART NUMBER:

NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY


					
RECYCLED RUBBER G3RR 19R001XXX	EXTERIOR CARPET G3EC 19C018XXX	HEAVY-DUTY CARPET G3HC 19C010XXX	VINYL G3V 19V002XXX	VINYL-ABRASIVE G3VA 19M001XXX	POURED ABRASIVE INSERT G3PA 19A005XXX

PEDITRED LP INSERT STYLES

FIELD NOTE: DIM 'B' TO BE TAKEN FROM FACE OF DOOR THRESHOLD TO DOOR THRESHOLD.

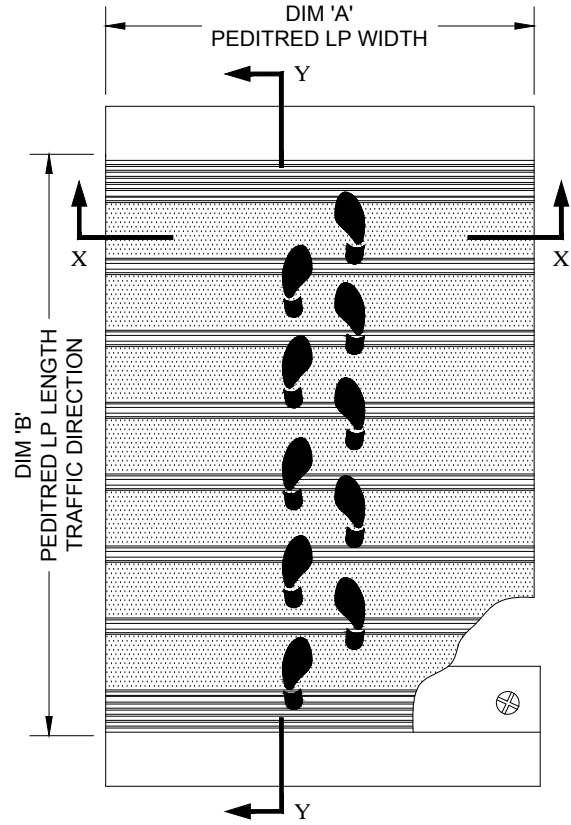

TYPICAL PLAN VIEW

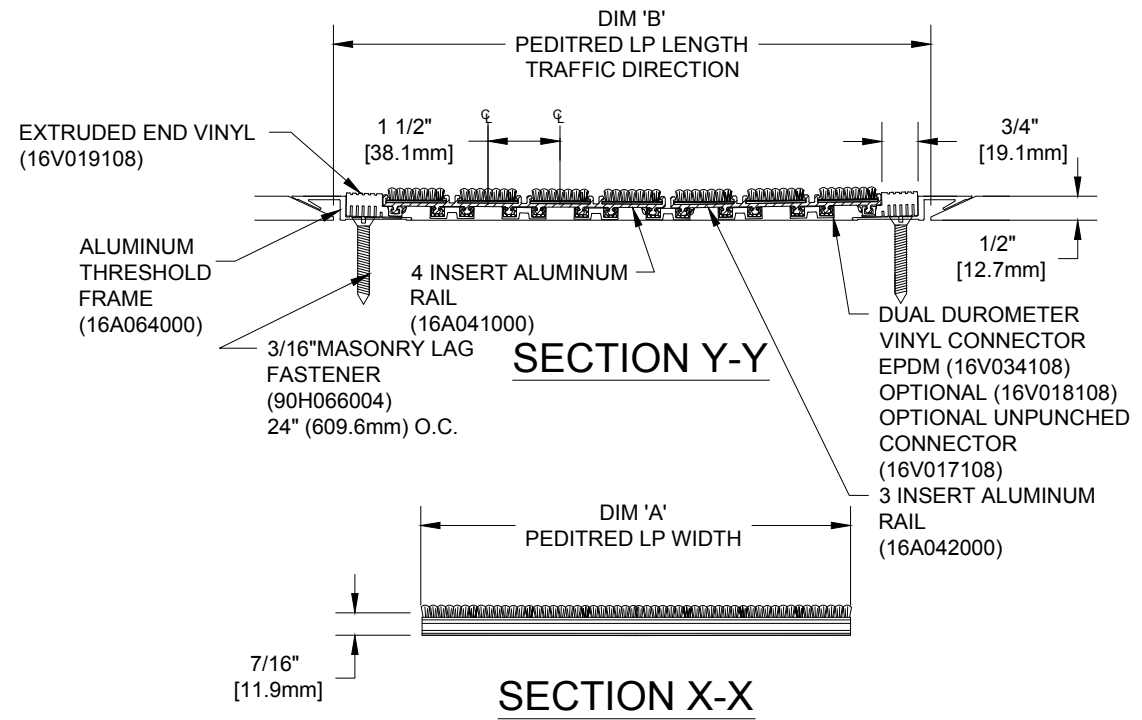

SECTION Y-Y

SECTION X-X

NOTES:

*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER

*PLEASE VERIFY TRAFFIC DIRECTION

*PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD.

*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 100 SQUARE FEET

À
À
À

*SUPPLIED IN STANDARD MILL FINISH. (OPTIONAL FINISHES AVAILABLE AT ADDITIONAL COST)



PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: