


**PEDITRED WITH TAPERED ANGLE FRAME**

INSERT STYLE:      INSERT COLOR:      CATALOG NUMBER: G4      PART NUMBER:


NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY




**PEDITRED INSERT STYLES**

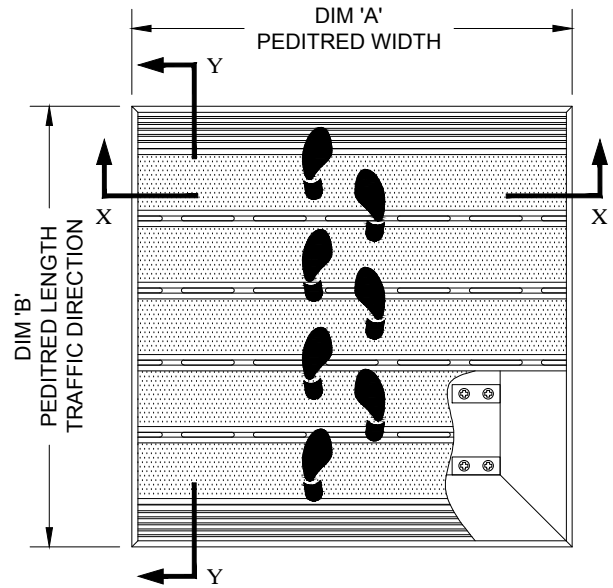

**TYPICAL PLAN VIEW**

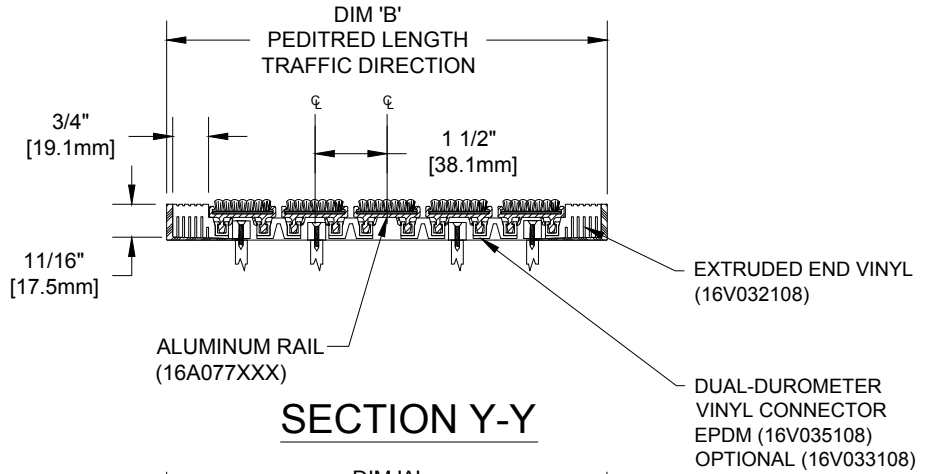

**SECTION Y-Y**

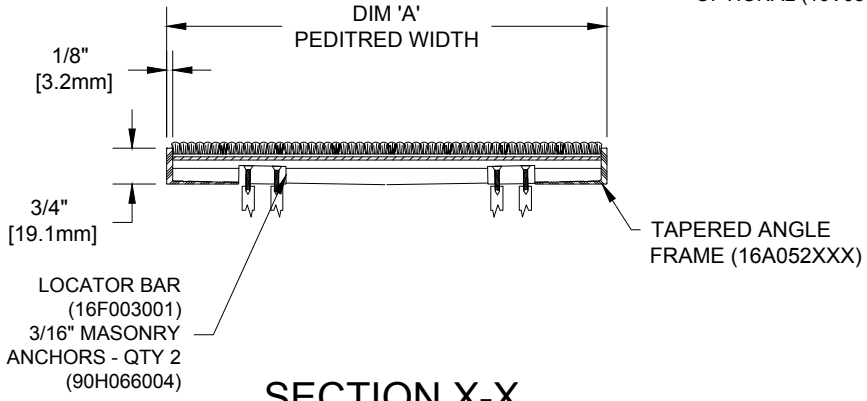

**SECTION X-X**

**NOTES:**

- \*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER
- \*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 100 SQUARE FEET
- \*PLEASE VERIFY TRAFFIC DIRECTION
- \*PEDITRED SHALL BE ABLE TO SUPPORT A 1000 LB. ROLLING LOAD.
- \*SUPPLIED IN STANDARD MILL FINISH. (OPTIONAL FINISHES AVAILABLE AT ADDITIONAL COST)



PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES	

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: